

LED Flood Light With Sensor

50W

230
lm/W



Features:

- *Super slim and efficient design
- *High light efficient and energy saving
- *Special heat treatment & Long life-span
- *Environmental friendly

Certificates:



Technical Specification


Item	ULFL-50W-CS
Power	50W
Lumen (±10%)	11500LM
Lumen Efficiency	230LM/W
Voltage	AC220-240V ~ 50/60Hz
CCT	3000K / 4000K / 5000K / 6000K
PF	>0.9
CRI	≥70
Beam Angle	120°
LED CHIP	SMD2835
THD	<20%
IP	IP65
IK	IK08
Housing Color	Black
Induction Distance	6-12M
Mounting Type	Bracket

Application

This product is suitable for hotels, conference rooms, factories, landscape lighting, and outdoor use.



Product size

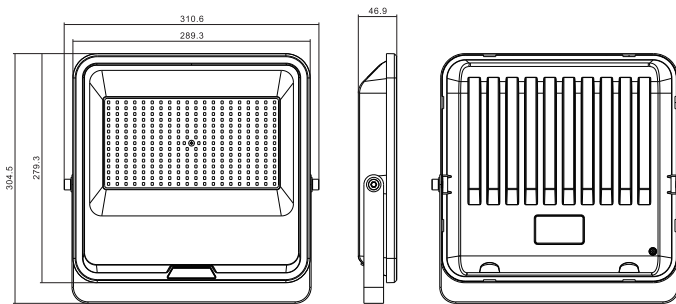

50W

Installation Method

1500MM


LONG AC INPUT CABLE

Satisfy most application fields in need of long AC input cable




AC connection part can be hidden in the dry place to avoid potential shortcut in rainy day due to the


LONG 1.5 METER AC CABLE DESIGN

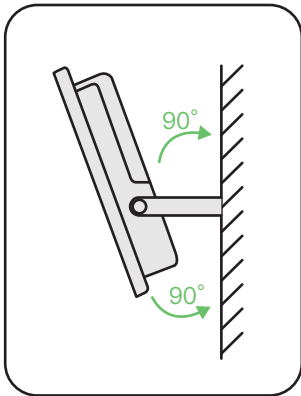
Wall-Mounted Type

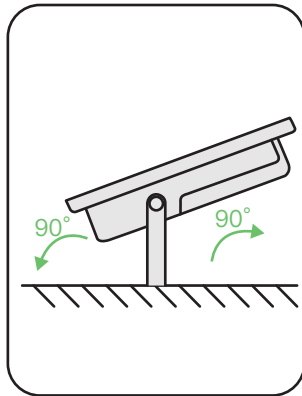

Floor-Standing Type

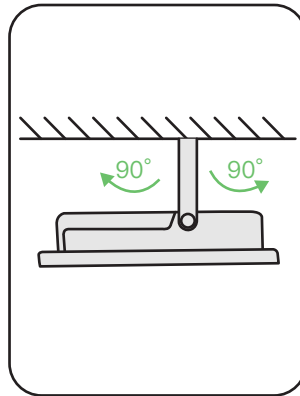

Ceiling-Mounted Type

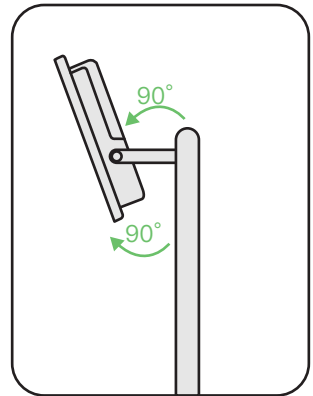


High-pole Mounted Type


Precautions

For your safety, please be sure to install it under the guidance of professional personnel. Before connecting the wires, please cut off the power supply. Only after ensuring that the power supply is de-energized can you connect the wires.



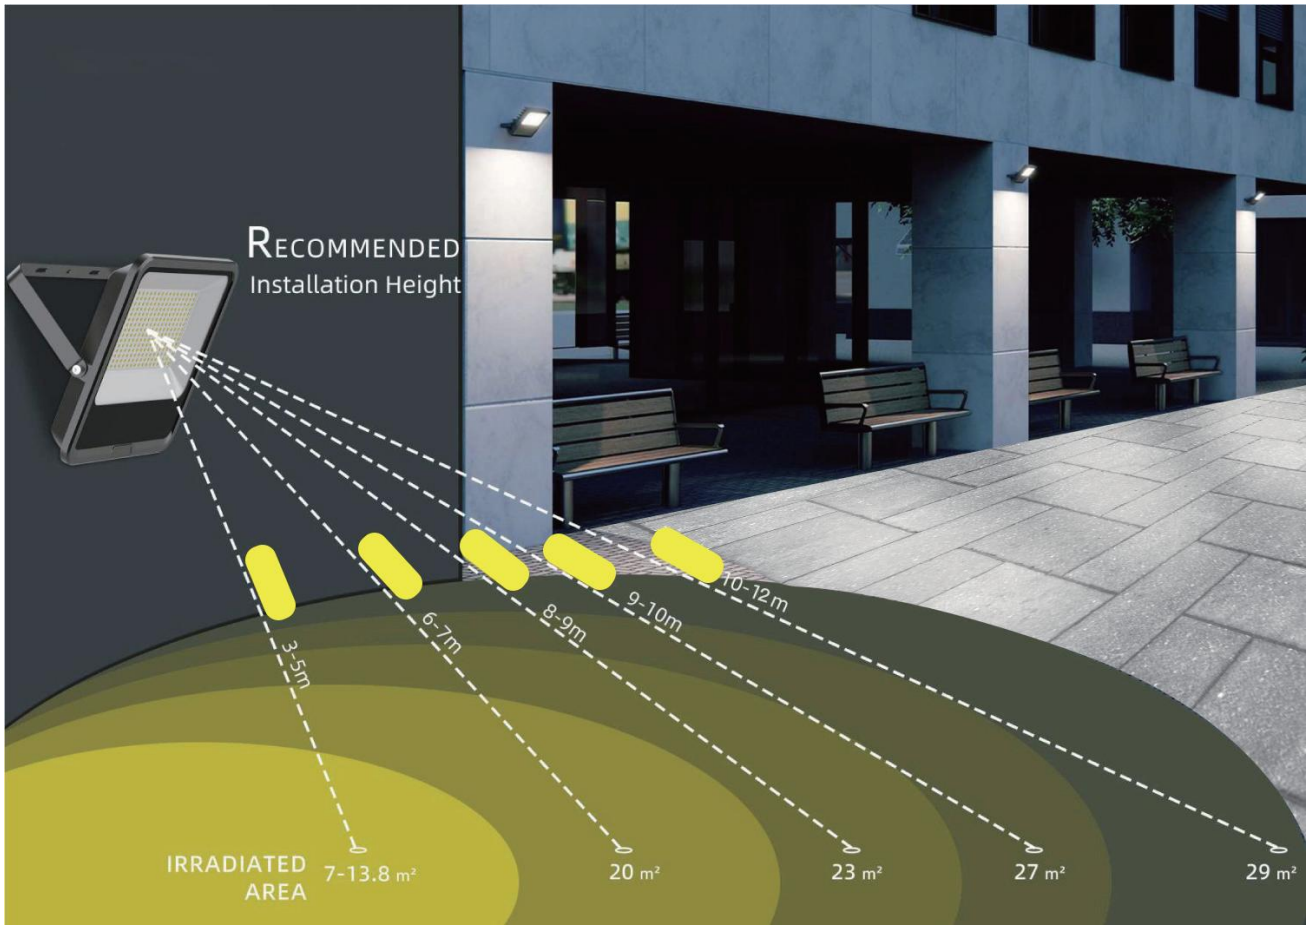



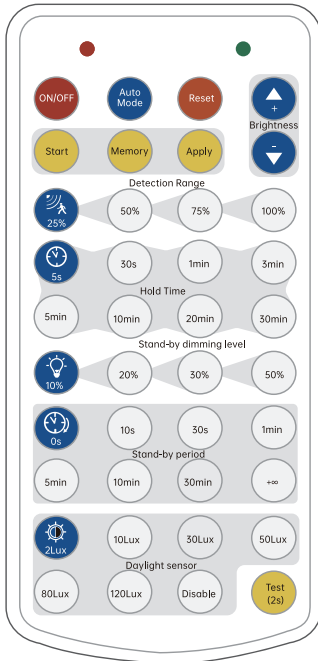






Irradiation Range



Remote For Dimming Sensors



Programable IR Remote Controller User Manual

Key	Function	Performance
	ON/OFF	<ol style="list-style-type: none"> 1. Switch ON/OFF the light. 2. Turn on the light as permanent on without sensor mode.
	Auto Mode	Switch to sensor mode and all sensor settings will recovery to the latest setting.
	Reset	Reset the sensor to default mode: 100% brightness, hold time 5min, stand-by period +∞, 100% sensitivity, daylight sensor diasable.
	+/- Brightness	<ol style="list-style-type: none"> 1. To adjust brightness 20%-100% in on/off mode. 2. To adjust highest brighttenss 60%-100% in sensor mode.
	Program Mode	Press "Start" to customize scene, users can change detection range, daylight threshold, holdtime, standby dimming level and standby period.
	Save Setting	<ol style="list-style-type: none"> 1. Press "Memory" to save all the settings. 2. The settings remained as the last time if not get resetted values.
	One Key Apply	<ol style="list-style-type: none"> 1. Press "Apply" to deliver the saved setting. 2. Press "Apply" without "memory" will make all the setting one-time operation. 3. Settings should be done within 30S, otherwise it exits memory mode.
	Detection Range	Detection range (Press to define detection area 100%/75%/50%/25%)
	Hold time	Hold time (Press to define holdtime 5s/30s/1min/3min /5min/10min/ 20min/30min)
	Stand-by dimming level	Stand-by dimming level (Press to define stand-by dimming level 10%/20%/30%/50%.)
	Stand-by period	Stand-by period (Press to define stand-by period 0s/10s/30s/1min/ 5min/10min/30min/+∞.) Note: "0s" means no standby period; "+∞" means unlimited standby period.
	Daylight threshold	Daylight threshold (Press to define daylight level 2Lux/10Lux/30Lux/ 50Lux/80Lux/120Lux/Disable.) Note: Disable means light will be turned on once sensor detects motion no matter what ambient lux.
	Test Mode	Sensor turn to test mode: The light will flash 3 times in 5s, after 5s sensor quit the test mode and resume to the latest setting.