

LED High Bay Light

100W / 150W / 200W



Features

- · Cold forging process with high stability.
- High luminous flux efficiency and good color rendering.
- No flickering, no dazzling and high brightness.
- Long life span,5 years warranty.
- OEM available.
- Remoted control Available.



UL LED LIGHTING PTY LTD


88 SUTTON STREET NORTH MELBOURNE VICTORIA 3051





Specifications

Model No	UL-H100W-16AL	UL-H150W-16AL	UL-H200W-16AL
Power	100W	150W	200W
Driver Brand	LIFUD		
Voltage	100-277VAC		
Dimmable	0~10V		
Light Efficiency	150LM/W		
Lumen (±10%)	100W	150W	200W
Color Temperature (CCT)	3000K-6000K		
Beam Angel	60°/90°/120°		
Color Rendering Index (CRI)	Ra>80		
LED Type	SMD2835		
Power Factor (PF)	>0.92		
IP Rank	IP65		
SENSOR	N/A(Available in Motion)		
SPD	4KV Line-Line,6KV Line-Earth		


Dimension(Unit:mm)

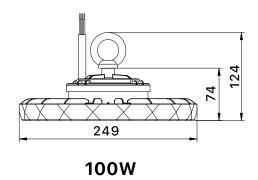

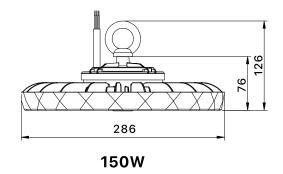


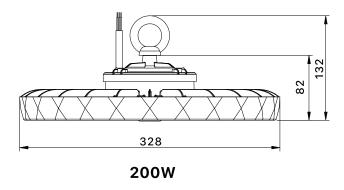





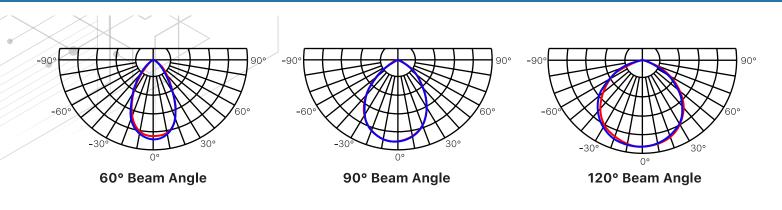



Basic Version 150Lm/W

























Application

This product is suitable for factories, workshops, warehouse, toll stations, gas stations, stadiums, supermarket, exhibition, commercial building, stadium hall, parking building etc.



Warning

Please read these instructions carefully before commencing any work.

- This unit must be fitted by a competent and qualified electrician.
- To avoid damage, falling, electric shock, or fire, please do not modify the lamp and replace accessories without confirming with the supplier.
- Maintenance/installation and replacement of the lamp, please confirm to cut off the power supply, and the lamp has set up a cooling. Please make sure the lamp has been properly installed before processing power.
- Ensure the lamp is in an accurate and reliable connection.
- Ensure that the product around the vent, and the lamp cannot violate any fire prevention regulations when used.