

UL-SSL-MINI-20W

20W



- Professional lens give the best illumination in the industry
- Versatile Mounting (Wall or Pole)
- Upon installation, self activates

Application

High way/Patio lighting/Bulding Parking/Bike Path/Suitable for Courtyard/Garden/Park/Street/Roadway/Pathway/Parking Lot/Private Road/Sidewalk/Public Square/Plaza.




PRODUCT SPECIFICATION

Lighting	
Light output	2000–2500LM
LED Chip	High bright 3030 with PMMA lens
CCT	2700–6000K (can be customized)
Life Span	100.000 hours to LM80 specifications
Working Way	Motion Sensor/Time Schedule
SolarPanel	
Power of PV module	20W
Life Span	25 years
Storage	
Battery Capacity	80WH
Autonomy	2–3days
Life Span	4000 cycles (10 years)
Charging Controller	
Life Span	12 years
Mechanical Specification	
Recommended Pole Height	4–6m
Recommended Top diameter of the Pole	40–60mm
Product Dimension (mm)	560*182*62
Weight (Kg)	3.2
Environment	
Working Temperature	–15°C to +70°C
Water Resistance	IP65


WORKING MODES

Triple ways of installation


Aluminum alloy



Vertical




Horizontal




Wall mounted

**INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS**



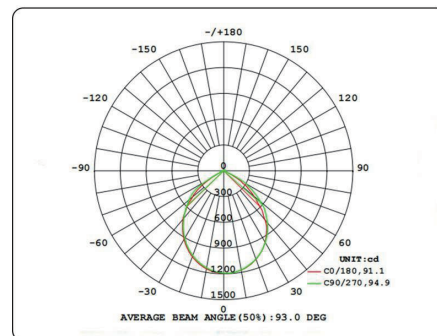


LIGHT DISTRIBUTION CURVE

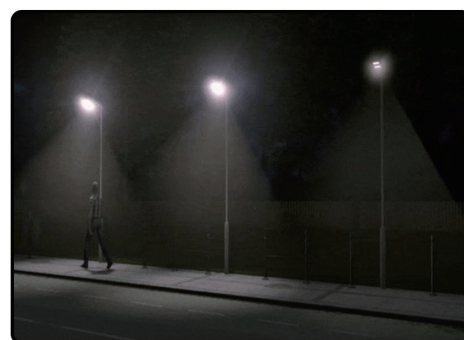


RADAR MODE (OPTIONAL)

The detective distance is about 6-8 meters.

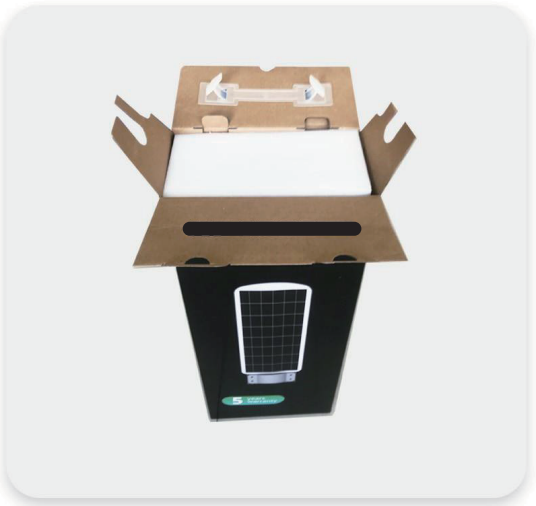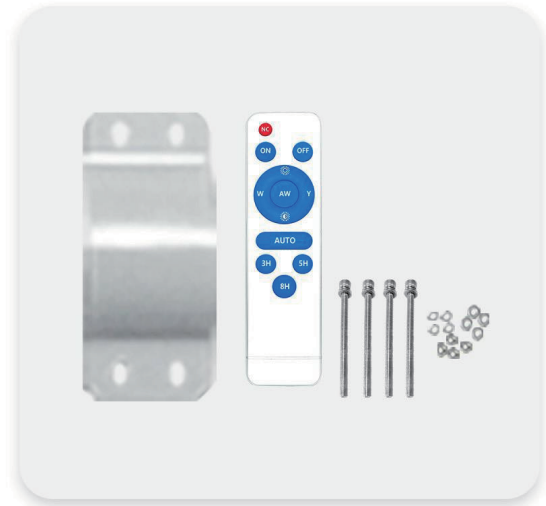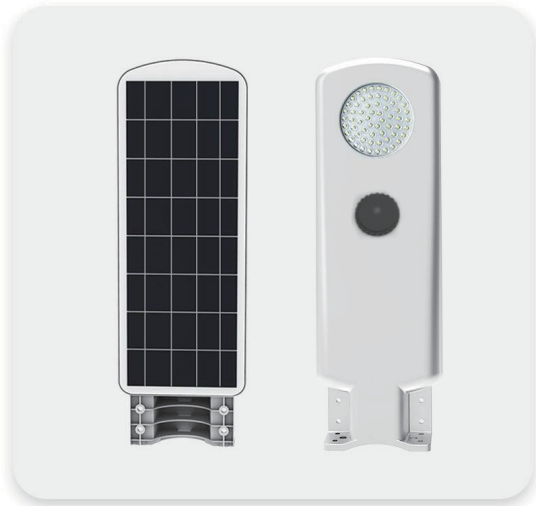

REMOTE CONTROL

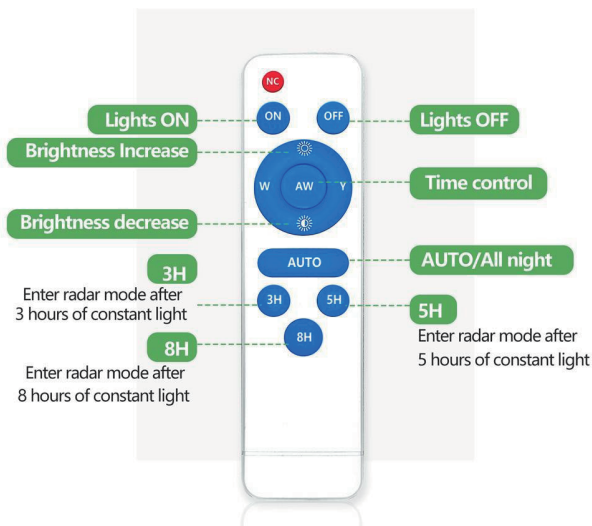

ITEM	PARTS	QTY	PICTURE
1	Light Body	1Set	
2	Hoop Anchor	1PC	
3	M8*80MM Screw with nut, spring, washer, flat washer	4Sets	
4	Remote Control	1Set	
5	Instruction Manual	1Set	